



INVESTOR IN PEOPLE

**PRIORITY  
DOCUMENT**SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

REC'D 10 SEP 2004


WIPO

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

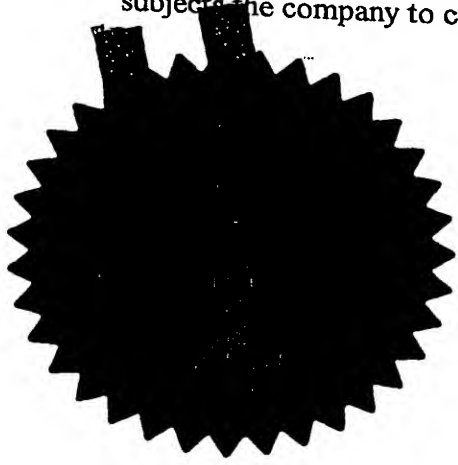

Signed

Dated 23 August 2004

**BEST AVAILABLE COPY**



21JUL03 8823842-1 002651  
P01/7700 0.00-0316921.6

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP10 8QQ

1. Your reference

597GB

2. Patent application number

(The Patent Office will fill in this part)

0316921.6

19 JUL 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Renishaw plc  
New Mills  
Wotton-under-Edge  
Gloucestershire, GL12 8JR  
2691002

Patents ADP number (If you know it)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Reader For A Scale Marking

5. Name of your agent (If you have one)

R D Cavill et al

"Address for service" in the United Kingdom to which all correspondence should be sent (Including the postcode)

Renishaw plc, Patent Department  
New Mills  
Wotton-under-Edge  
Gloucestershire  
GL12 8JR

Patents ADP number (If you know it)

7908650001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (If you know it) the or each application number

Country

Priority application number  
(If you know it)

Date of filing  
(day / month / year)

-

-

-

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

-

-

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 8 ✓

Claim(s) 0

Abstract 0

Drawing(s) 4 + 4 8 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 0

Request for preliminary examination and search (Patents Form 9/77) 0

Request for substantive examination (Patents Form 10/77) 0

Any other documents (please specify) 0

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 18.07.03

AGENT FOR THE APPLICANT

12. Name and daytime telephone number of person to contact in the United Kingdom

A Iles 01453 524524

### Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

**READER FOR A SCALE MARKING**

The present invention relates to a detector for detecting a reference mark or the like, in particular  
5 but not exclusively during measurement operations which use a scale and a scale reader.

The detection of reference marks is disclosed in our prior patent publication no. PCT/GB02/00638, the  
10 disclosure of which is incorporated herein by reference.

Reference marks allow a reader to find its position and are usually provided separately to periodic scale marks  
15 which provide an incremental signal to the reader for determining displacement. A reference mark could be anything that is recognisable by the reader. In practice a pattern is used because it is simple to produce and is more reliable, producing fewer false  
20 readings. When a pattern is used the reader will have a similar pattern so that when the mark and reader align a stronger signal is provided by the reader.

Combined reference and scale marks have been used  
25 commercially. In such instances the reference mark may be formed by a pattern of missing bits of the scale. The incremental signal from the periodic scale is read over a portion of the scale large enough to compensate for missing bits of the scale.

30

In order to improve accuracy known scale readers have employed two detectors e.g. photodiodes, usually called split detectors, to read a scale. The two photodiodes have been offset one relative to the other in the

direction of measurement by a small amount. When this configuration has been used the output of one photodiode lags behind (or is in front of) the other. A known technique is to produce a zero crossing output  
5 (detailed below) from the two photodiodes which improves detection accuracy.

The invention provides a reference mark reader having a patterned array of detectors for detecting a reference  
10 mark on a measurement scale wherein each of the detectors has an output, two or more of the detector outputs are summed to provide a first summed output and others of the detector outputs are summed to provide a second summed output, and the second summed output is  
15 subtracted from the first summed output.

In one preferred form the array of detector comprises two sets of detectors, however, there are drawbacks to using two sets of detectors: there is an increased  
20 cost; alignment of the two sets is difficult during manufacture; and misalignment between the reader and the reference mark is a problem during use.

The present invention provides also a reference mark  
25 reader having a single patterned array of detectors and a zero crossing output.

In this way a zero crossing output can be obtained from a single row of detectors.  
30

The detectors may be photodiodes or a photodiode block. The first and second summed outputs may be subtracted by means of a difference amplifier. The outputs of the detectors may each be converted into digital form and

summed digitally.

Embodiments of the invention will now be described with reference to the accompanying drawings, in which:

5 Figs 1a and b show a reference mark reader arrangement according to the invention;

Figs 2a,b and c show another reference mark reader arrangement according to the invention;

10 Fig 3 shows an electrical schematic diagram of the components used in the reader shown in Figs 2a,b and c;

Figs 4,5,6 and 7 show alternative reference mark reader arrangements.

15 Fig 1a shows a novel arrangement of a reference mark reader 20 and a reference mark rm incorporated into an incremental scale 10.

20 In this arrangement a scale 10 has periodic markings of alternating transparent 12 and opaque 14 areas, e.g. chrome on glass. These markings are used in a conventional way to produce a signal indicative of displacement, using a conventional reader (not shown) adjacent the reference mark detector 20. In this arrangement a scale can move in the direction of arrow x and, in practice, its opposite direction also. For simplicity travel in the x direction only is described.

25 Incorporated into the periodic scale markings 12 and 14 is a reference mark rm. In this example the mark is 7 periods long. The reference mark could be completely separate from the incremental scale in which case any size of pattern could be used. The reference mark reader 20 has a point light source 22, light from which propagates through the transparent areas 12 and onto

rows of detectors A and B. Each row of detectors is formed from 7 photodiodes 1-7. The light will fall with little effect on the detectors as the scale is moved relative to the detectors. The reference mark  
5 has a pattern 1100101 where "1" represents a transparent area 12 and "0" represents an opaque area 14. Therefore, detectors 1,2,5 and 7 in each row only are monitored, which corresponds to the illuminated detectors when the reference mark 1100101 coincides  
10 with the corresponding pattern formed by those monitored detectors.

When the reference mark coincides with each detector, rather than substantially ineffectual light falling on  
15 those detectors, each detector is fully illuminated and a sudden increase in output  $V_A$  and  $V_B$  is effected.

Detector rows A and B are staggered by one detector width in this instance, so signal peaks  $V_A$  and  $V_B$  are  
20 staggered also. To improve accuracy signal  $V_B$  is subtracted from signal  $V_A$  at difference amplifier 24 to give an overall output signal  $V_{OUT}$ . It will be noted that  $V_{OUT}$  crosses zero at a distinct point and this zero-crossing can be used to give accurate positional  
25 information.

In this embodiment a mask can be placed over the detectors and all detectors can be monitored. This  
30 modification will achieve the same results as the arrangement illustrated. Alternatively, the unmonitored detectors 3,4 and 6 could be left out altogether.

Whilst the arrangement shown in Figs 1a and 1b is

satisfactory, it could be improved. Figs 2a,b and c illustrate an improved embodiment of the invention.

5 The components used in Figs 2a,b and c are similar to those illustrated in Figs 1a and b, however, only one row of detectors 20' is used in Figs 2a,b and c. The reference mark 1100101 is used again but the way in which the corresponding detectors are monitored is different. The reference mark pattern is written in  
10 the second row of the table illustrated in Fig 2c. The next row in this table has the same pattern displaced one place to the left (it could be more than one place and could be displaced to the right). The two rows are subtracted one column at a time and the result is given  
15 in the lowest row. This result dictates the pattern of the detectors. Now, a "1" detector (i.e. detectors 3,6 and 8) is connected to output A and a "-1" detector (i.e. detectors 1,5 and 7) is connected to output B. The resultant output of these connections when the  
20 1100101 reference mark is detected is the outputs  $V_A$  and  $V_B$ . When the outputs are subtracted a zero-crossing signal  $V_{OUT}$  is obtained again.

25 Since only one single row of detectors is used in this embodiment the reader is less susceptible to yaw misalignment and is cheaper to produce.

Fig 3 shows a simplified electrical schematic diagram of one way in which the signals from the detectors 20' of Figs 2a and b can be processed. The same scheme  
30 could be used for the arrangement shown in Figs 1a and b also. Photodetector diodes D1 to D8 are shown. Diodes D3,D6 and D8 are connected to the input of an amplifier 26A for turning their current outputs into a



voltage  $V_A$ . Diodes D1, D5 and D7 are likewise connected to an amplifier 26B. The outputs of the amplifiers 26A and 26B are connected to the input of difference amplifier 24 which subtracts  $V_B$  from  $V_A$  to produce an output signal  $V_{OUT}$ . Diodes D2 and D4 are not used and are connected to 0V.

The amplitude of the  $V_{OUT}$  signal is used in this instance to activate a further circuit (not shown) which produces a signal when  $V_{OUT}$  crosses zero.

In addition to the difference amplifier 24 a summing amplifier 28 is shown. This amplifier sums the voltages  $V_A$  and  $V_B$  to produce a voltage  $V_{COUT}$ .  $V_A$  and  $V_B$  will be at a maximum when all the respective photodiodes are illuminated i.e. when a solid block of "1"s (in this instance) is encountered by the detector.  $V_{COUT}$  can be used to detect control marks on the scale e.g. end stops. Other values of  $V_{COUT}$  e.g. zero,  $\frac{1}{2}$ ,  $\frac{3}{4}$  of maximum can be used to indicate other control marks.

Fig 4 shows an alternative arrangement for processing the signals produced by the detectors 20'. Voltage signals  $V_A$  and  $V_B$  are fed into two respective analogue-to-digital converters (A-D) 30A and 30B. These A-Ds in turn feed a microprocessor 34 which gives a reference pulse output. The microprocessor might be used to convert the voltage signals  $V_A$  and  $V_B$  into digital form without the need for the A-Ds 30A and 30B.

Figs 5, 6 and 7 show alternative configurations of detector 20 and scale 10. In Fig 5 a reflective scale 10 is used and a light source 22 is to one side of the detector block 20. The reference mark could be

reflective and the scale background non-reflective or vice versa. The light 22 could be in the middle of the block 20.



5 Fig 6 shows a collimated light source producing light which passes through a transparent reference mark on scale 10. Fig 7 shows a diffuse light source 28 producing light which passes through a reference mark on scale 10 and an imaging device such as pinhole, slit  
10 or lens 26. From the imaging device the light propagates to the detector 20.


In Figs 5,6 and 7 the same detector arrangement as described above may be used.

15


Many variants and modifications to the embodiments described and illustrated will be apparent. The reference mark is illustrated as being incorporated into an incremental scale. However, it is possible  
20 that a separate reference mark may be provided and the invention need not be used with an incremental scale. The reader may be moved whilst the scale is stationary or vice versa. Both may move relative to each other. The invention is described with reference to light and  
25 a light source. The light could be a point source e.g. a laser diode, an area source e.g. an LED, diffuse light e.g. an LED array or ambient light. The light used could be convergent, divergent, collimated or diffuse. The light may not be visible, it could be  
30 infra-red light or some other part of the electromagnetic spectrum. The invention could be practised with detectors other than light detectors e.g. magnetic detectors for use with a magnetic reference mark may be employed. A patterned reference

mark having a pattern 1100101 is illustrated but any recognisable pattern could be used. The pattern need not extend in a linear manner as shown but could be 2-dimensional. In practice a 24 bit series of "1"s and "0"s representing light transmissive/reflective, and non-transmissive/non-reflective parts of a mark has proven satisfactory. One example of such a series is 110101010110100100110011.


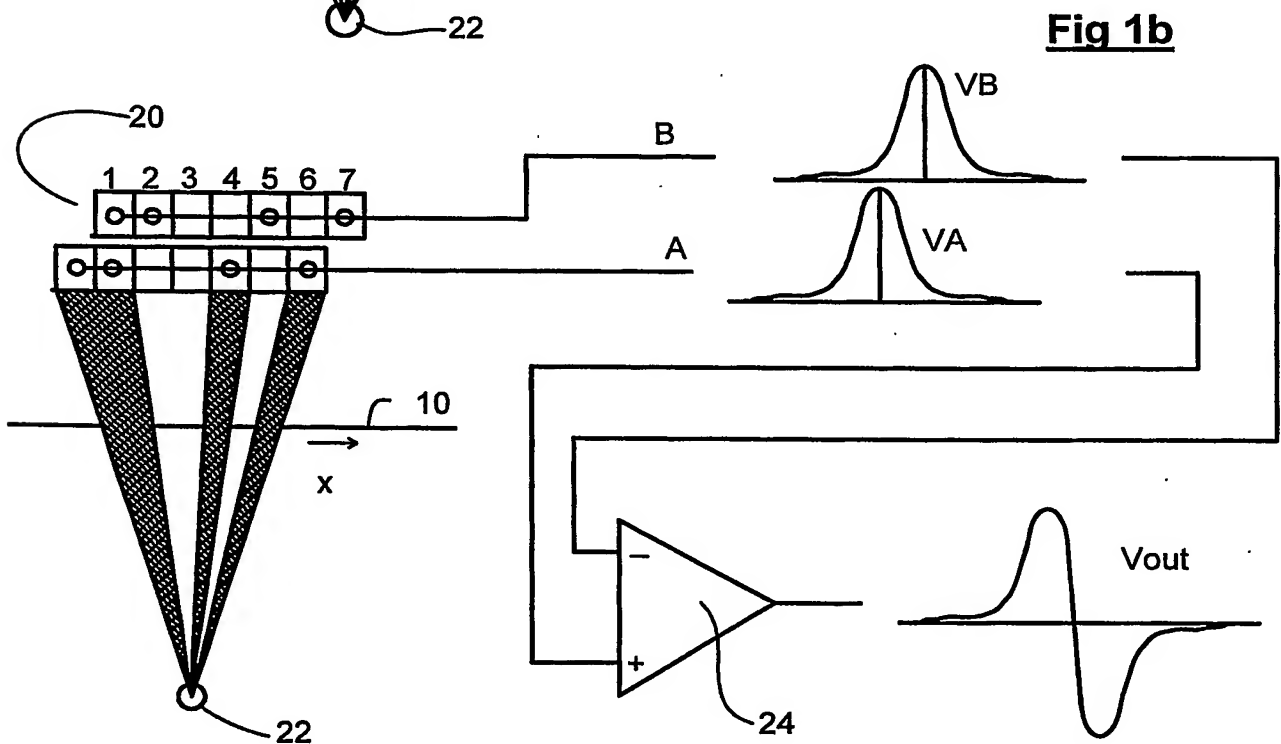
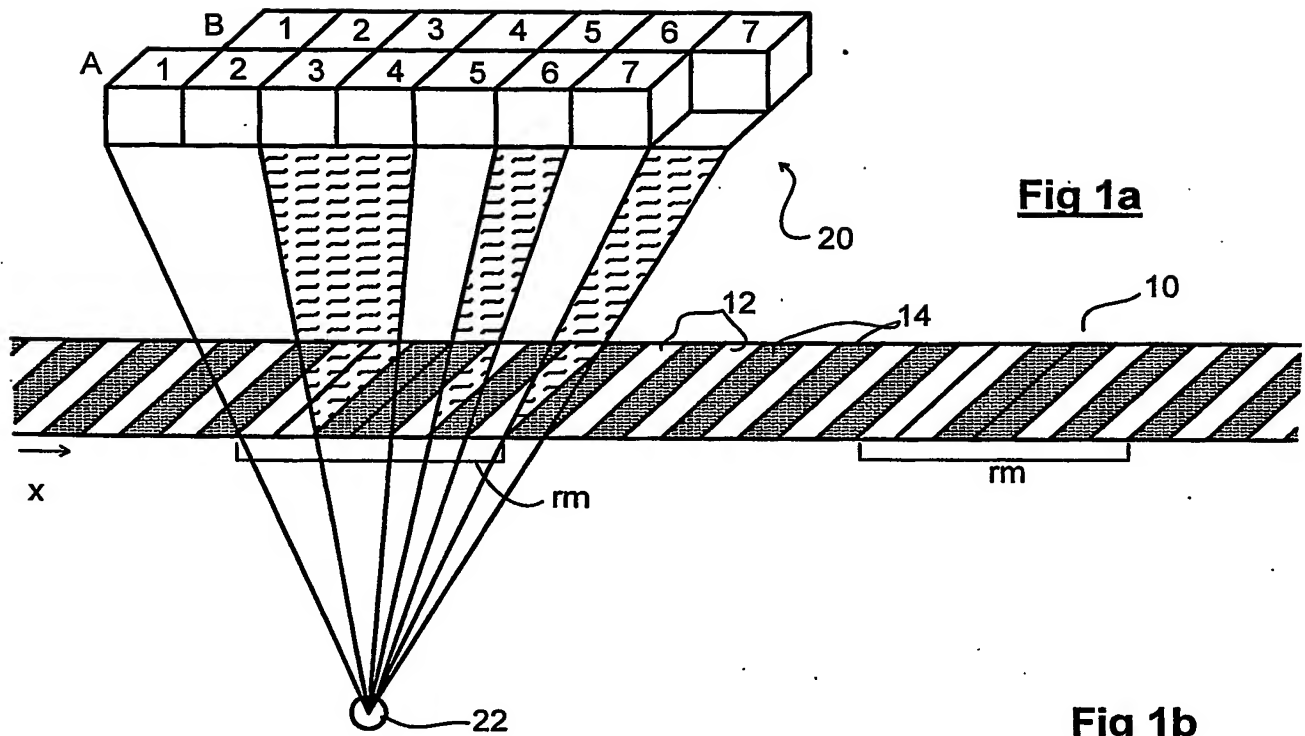


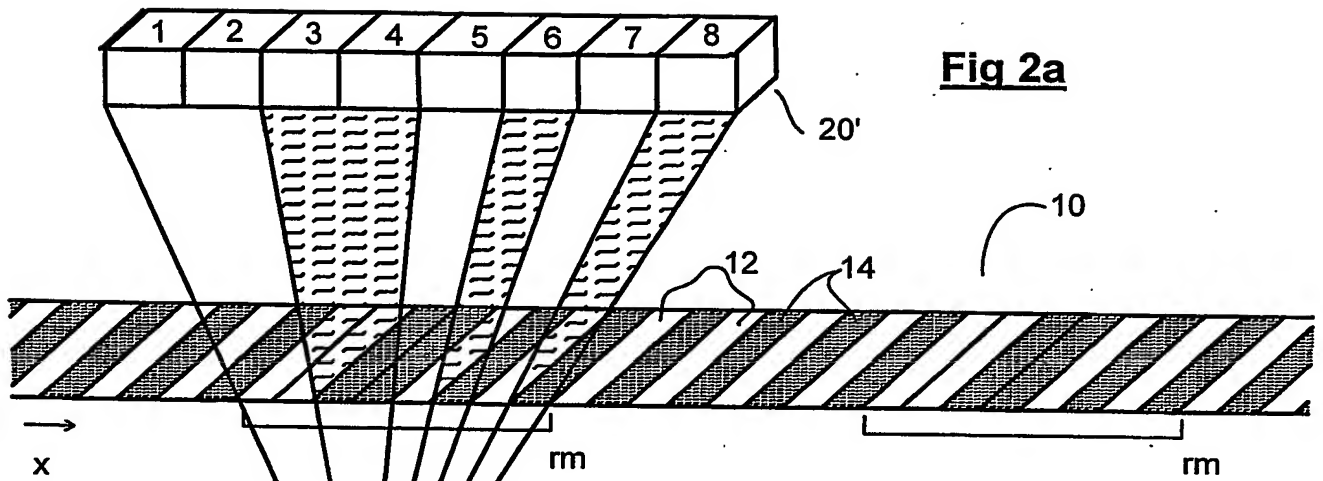**Fig 2c**

1	2	3	4	5	6	7	8
(0)	1	1	0	0	1	0	1
1	1	0	0	1	0	1	(0)
-1	0	1	0	-1	1	-1	1

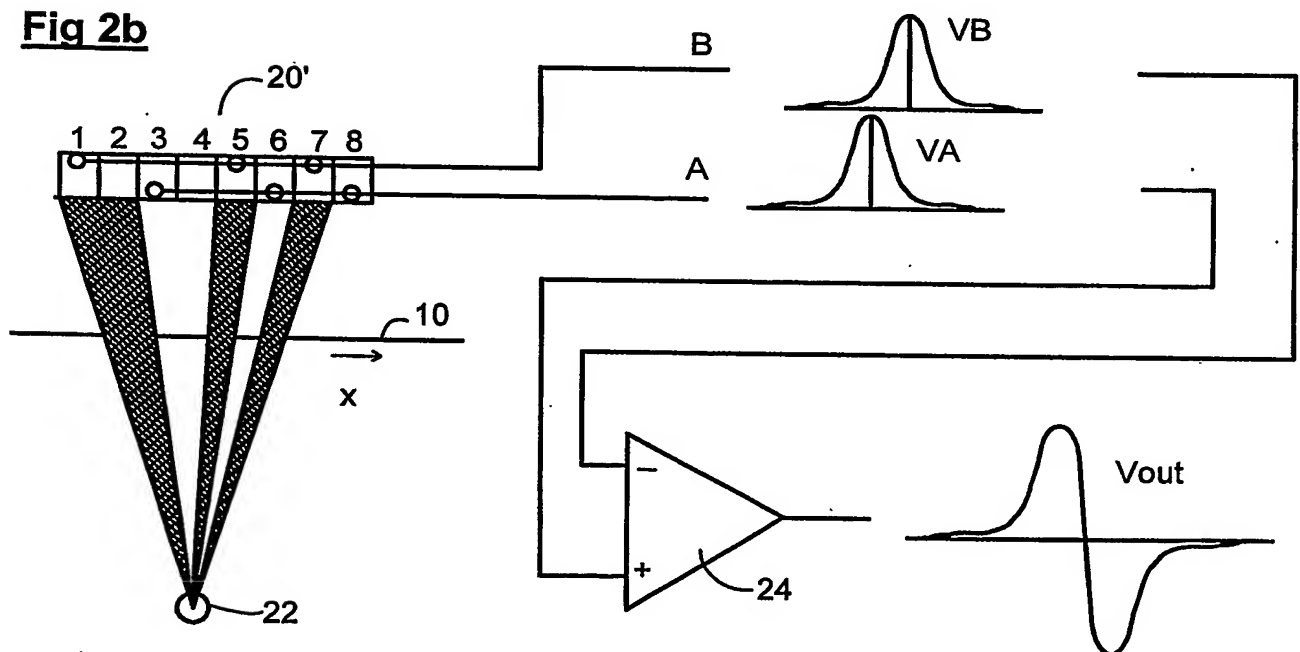**Fig 2b**

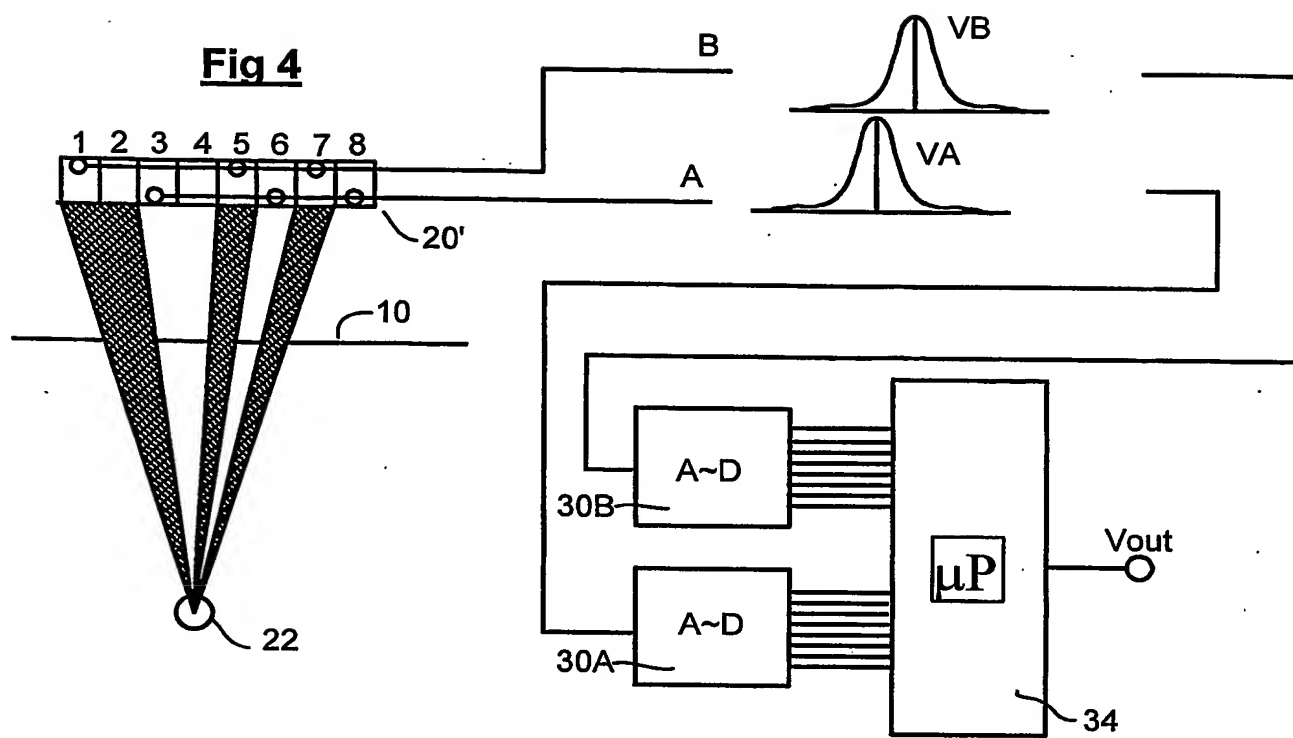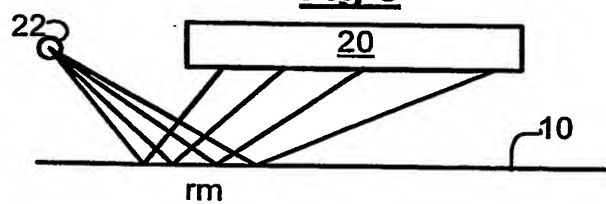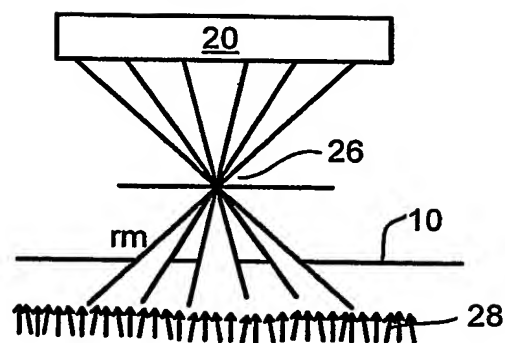

**Fig 4****Fig 5****Fig 7****Fig 6**